
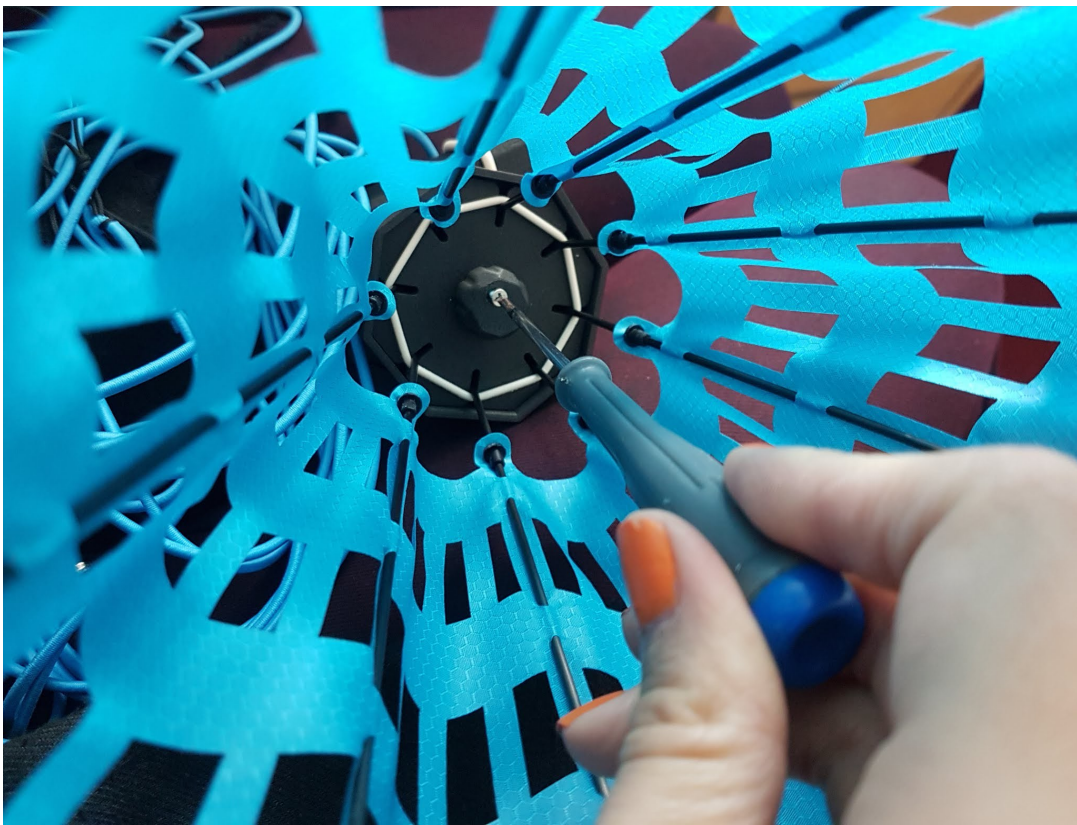


Replacing head on ChaseXC


1. Unfold your ChaseXC and remove the secure screw from the black cap
2. Remove the black cap from white nylon screw*
3. Fold the tail and detach the head by rotating it until it is removed
4. Place the new head and unfold the tail**
5. Return the black cup and then the secure screw to their position
6. Fold and the ChaseXC is set to go

* you can use the new nylon screw which was packed with the head or your old one

** the arrows and marks representing opened/closed tail will help confirm if it was set correctly; they should be symmetrically upwards as shown in the picture. Also the stitching on skirt should be at the bottom. If this is not the case, turn the head of the nylon screw as necessary

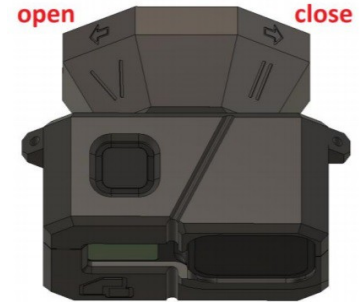

ChaseXC Tail:

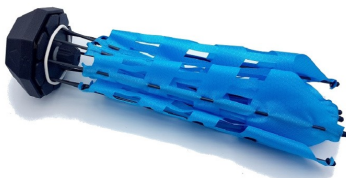

ChaseXC Head:

